

**DATASHEET**

Issue 1

**NEW
FUNCTIONS**

Multifunction Meters

Transducers & Isolators

Temperature Controllers

Converters & Recorders

Digital Panel Meters

Current Transformers

Analogue Panel Meters

Shunts

Digital Multimeters

Clamp Meters

Insulation Testers

NR30 - RAIL MOUNTED POWER NETWORK METER

NR30IoT - RAIL MOUNTED POWER NETWORK METER FOR IoT APPLICATIONS

Product Characteristics

- ➔ Measurement of 54 power network parameters and current and voltage harmonics up to 63rd, in 1-phase 2-wire or 3-phase 3 or 4-wire balanced and unbalanced systems
- ➔ The MQTT protocol is ideal for communication in distributed acquisition systems data - IoT applications (NR30IoT)
- ➔ High accuracy class (0.2s for active energy)
- ➔ Backlit LCD screen fully configurable by a user (22 views, 3 parameters in each)
- ➔ For direct (up to 63A) and indirect measurement (x/1A or x/5A)

SUBJECT TO CHANGE WITHOUT NOTICE

This datasheet superseded all previous versions – please keep for future reference

Features


- ➔ Measurement of 54 power network parameters and current and voltage harmonics up to 63rd, in 1-phase 2-wire or 3-phase 3 or 4-wire balanced and unbalanced systems
- ➔ The MQTT protocol is ideal for communication in distributed acquisition systems data - iot applications (NR30IoT)
- ➔ High accuracy class (0.2s for active energy)
- ➔ Backlit LCD screen fully configurable by a user (22 views, 3 parameters in each)
- ➔ For direct (up to 63A) and indirect measurement (x/1A or x/5A)
- ➔ Indications considering values of programmed ratios.
- ➔ Memory of minimum and maximum values
- ➔ 2 configurable alarm outputs
- ➔ Optional: with an additional module of analogue outputs S4AO (max. 4 current or voltage outputs)
- ➔ Digital output RS-485 - MODBUS protocol
- ➔ Archiving of up to 32 measured parameters in the internal memory 8GB




- Modern and user-friendly ethernet interface 10/100 BASE-T:
- protocol: MODBUS TCP/IP, HTTP, FTP
- protocol: MQTT (NR30IoT)
- services: www server, ftp server, DHCP client
- Programming of parameters through usb using free econ software
- Battery backup RTC
- Modular housing for S-rail according to EN 62208 (the meter has a width of 6 modules)
- Supervisory relay mode for alarm outputs (NR30 and NR30IoT)
- MQTT protocol (for NR30)

Remark:

- To make functions active, order appropriate licence key – details in ordering code.

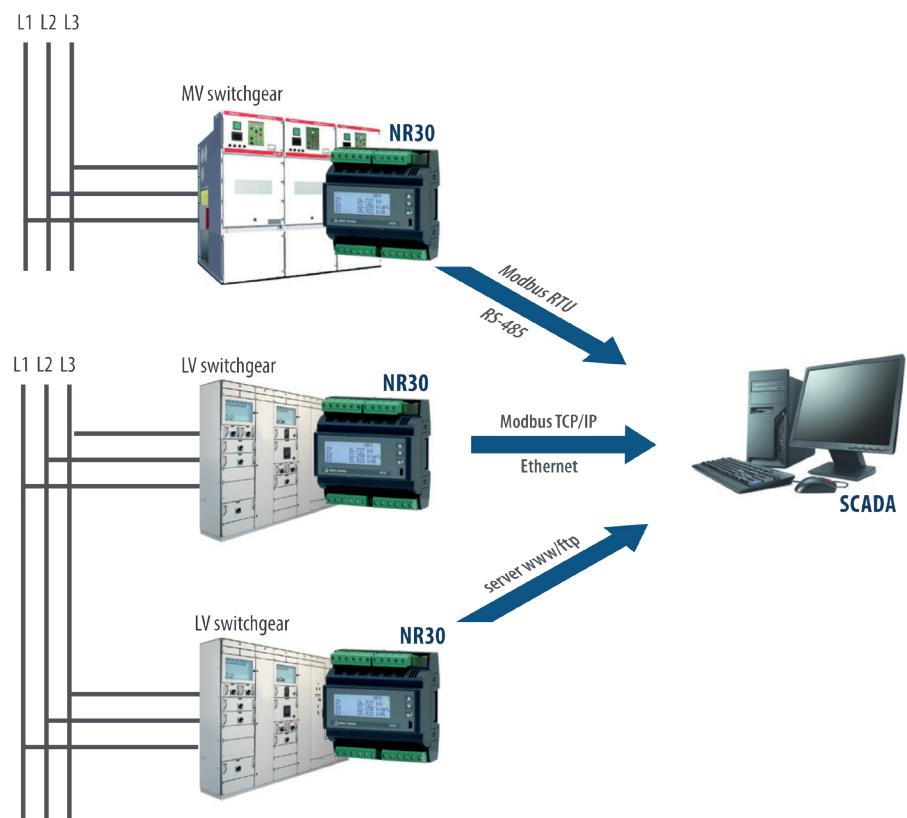
Example of Application

Example of Application

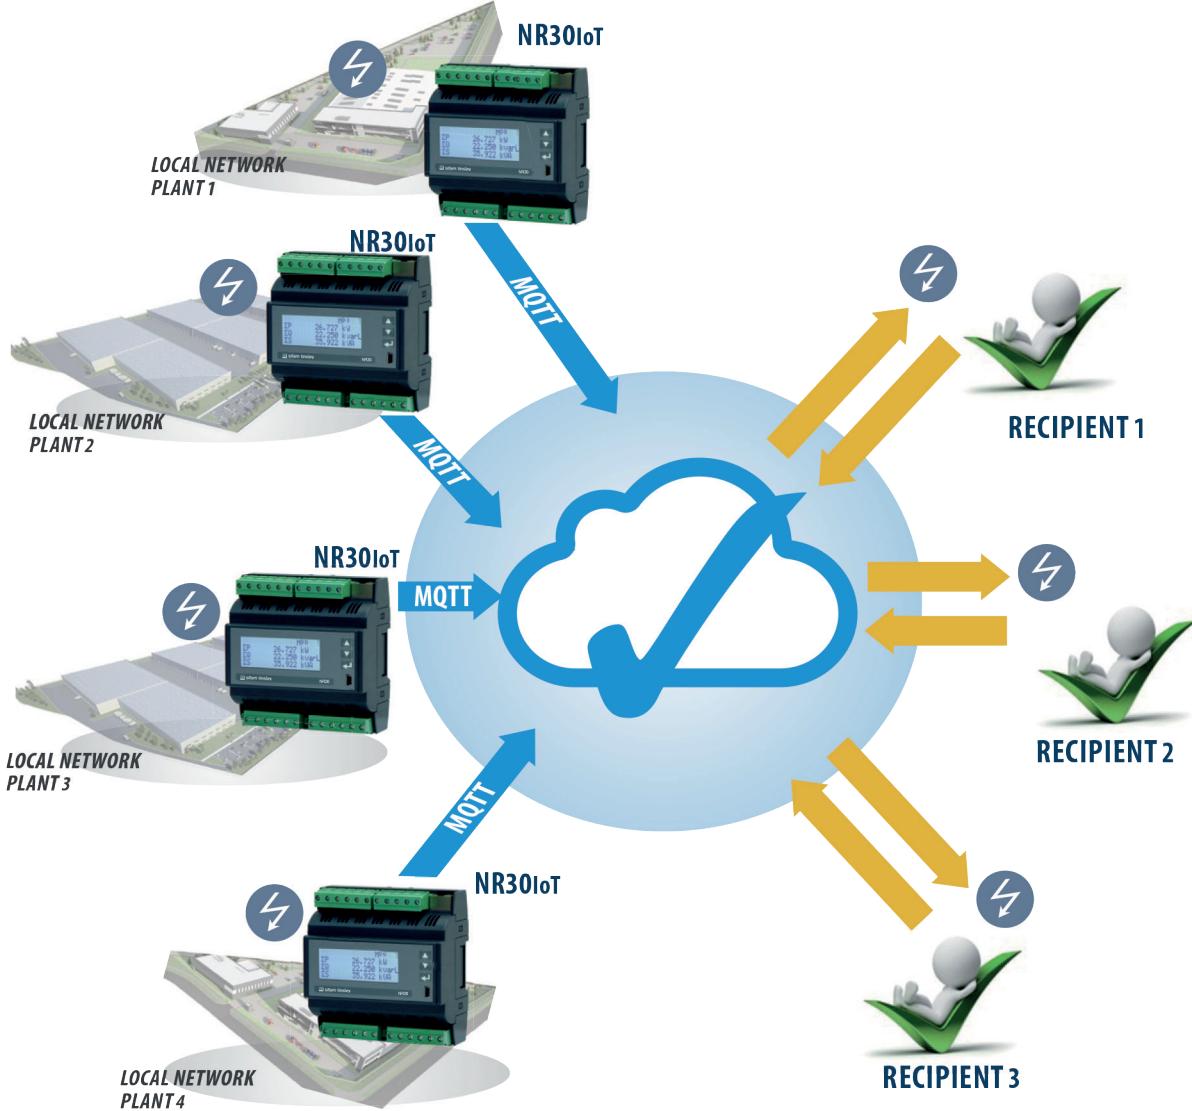

Measurement and Visualisation of Power Network Parameter

- phase voltages: U_1, U_2, U_3
- phase-to-phase voltages: U_{12}, U_{23}, U_{31}
- phase currents I_1, I_2, I_3
- active phase powers: P_1, P_2, P_3
- reactive phase powers: Q_1, Q_2, Q_3
- apparent phase powers: S_1, S_2, S_3
- active power factors: $\text{PF}_1, \text{PF}_2, \text{PF}_3$
- reactive/active power factors: $\text{tgj}_1, \text{tgj}_2, \text{tgj}_3$
- active, reactive and apparent 3-phase power: P, Q, S
- mean 3-phase power factors: PF, tgj
- frequency f
- mean 3-phase voltage: U_s
- mean phase-to-phase voltage: U_{mf}
- mean 3-phase current: I_s
- 15, 30, 60 minutes' mean active power: P_{demand}
- mean apparent power S_{demand}
- average current I_{demand}
- active, reactive and apparent 3-phase energy: $\text{EnP}, \text{EnQ}, \text{EnS}$
- active, reactive and apparent energy from external counter: EnPE
- total harmonic content coefficients for phase voltages and currents $\text{THD}_{U_1}, \text{THD}_{U_2}, \text{THD}_{U_3}, \text{THD}_{I_1}, \text{THD}_{I_2}, \text{THD}_{I_3}$ and for 3-phase voltages and currents $\text{THD}_U, \text{THD}_I$
- harmonics for current and phase voltage up to 63rd!

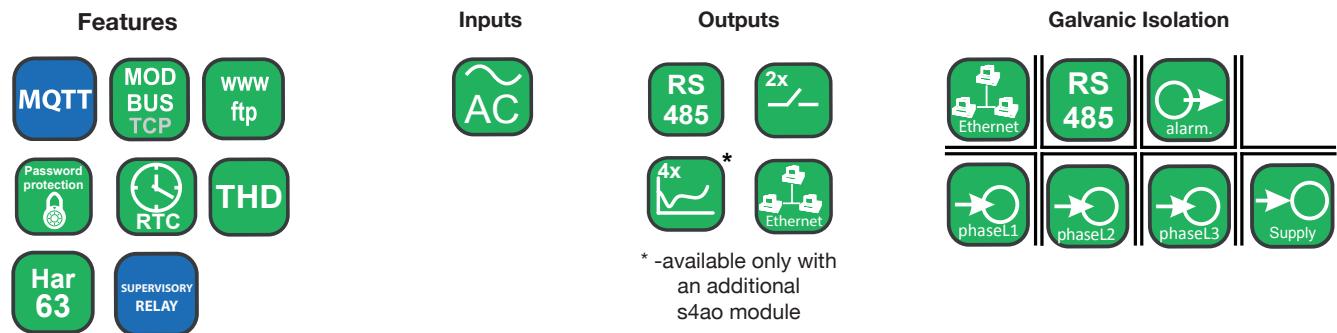

Technical Data

Measuring Ranges

Measured value	Measuring range	I1	I2	L3	Σ	class
Current 1/5 A 1 A~ 5 A~	0.010 .. 0.100 .. 1.200 A (tr_l=1) 0.050 .. 0.500 .. 6.000 A (tr_l=1) ...20.00 kA (tr_l≠1)	.	.	.		0.2 (EN 61557-12)
Voltage L-N 57.7 V~ 230 V~ 400 V~	5.7..11.5 .. 70.0 V (tr_U=1) 23.0..46 .. 276.0 V (tr_U=1) 40.0..80 .. 480.0 V (tr_U=1) ...480.0 kV (tr_U≠1)	.	.	.		0.2 (EN 61557-12)
Voltage L-L 100 V~ 400 V~ 690 V~	10.0 .. 20..120.0 V (tr_U=1) 40.0..80 .. 480.0 V (tr_U=1) 69.0..138 .. 830.0 V (tr_U=1) ...830.0 kV (tr_U≠1)	.	.	.		0.5 (EN 61557-12)
Active power P_i , average active power P_{dt}	.. (-)1999.9 W .. (-)1999.9 MW (tr_U≠1.tr_l≠1)	0.5 (EN 61557-12)
Reactive power Q_i	.. (-)1999.9 Var .. (-)1999.9 MVar (tr_U≠1.tr_l≠1)	1 (EN 61557-12)
Apparent power S_i , average apparent power S_{dt}	..1999.9 VA ..1999.9 MVA (tr_U≠1.tr_l≠1)	0.5 (EN 61557-12)
active energy enp (imported or exported)	.. (-)1999.9 Wh .. (-)1999.9 MWh (tr_U≠1.tr_l≠1)				.	0.2s (en 62053-22)
Reactive energy EnQ (inductive or capacitive)	.. (-)1999.9 Varh .. (-)1999.9 MVarh (tr_U≠1.tr_l≠1)				.	1 (EN 61557-12)
Apparent energy EnS	.. 1999.9 VAh ..1999.9 MVAh (tr_U≠1.tr_l≠1)				.	0.5 (EN 61557-12)
Active power factor PF_i	-1.00 .. 0 .. 1.00	1 (EN 61557-12)
Coefficient tg	-999.99 .. 0 .. 999.99	1
Frequency f	45.00..65.00 Hz				.	0.1 (EN 61557-12)
Total harmonic distortion of voltage THDU and current THDI	0.0 .. 100.0 %	5 (EN 61557-12)
Amplitudes of the voltage $U_{h2} \dots U_{h63}$, and current $I_{h2} \dots I_{h63}$	0.0 .. 100.0 %	.	.	.		II (IEC61000-4-7)

tr_l - Ratio of current transformer = Primary current of transformer / Secondary current of current transformer,
 tr_U - Ratio of voltage transformer = Primary voltage of transformer / Secondary voltage of voltage transformer,

Outputs

output type	properties
Relay output	2 x programmable relays, non-voltage contacts, load capacity 0.5 A / 250 V a.c. or 5 A / 30 V d.c.

Digital Interface

interface type	transmission protocol	Remarks
USB 1.1/2.0	Modbus RTU 8N2	baud rate 115.2 kbit/s; firmware update
RS-485	Modbus RTU 8N2, 8E1, 801, 8N1	Address 1..247 baud rate: 4.8, 9.6, 19.2, 38.4, 57.6, 115.2 kbit/s
Ethernet 10/100 Base-T	Modbus TCP, HTTP, FTP MQTT (NR30IoT)	WWW server, FTP server, DHCP client

External Features



readout field	20 x 4 lines LCD character display; white background, black characters	
overall dimensions	105 x 110 x 60 mm	
Weight	0.3 kg	
protection grade	from frontal side: IP50	from terminal side: IP00

Rated Operating Conditions

supply voltage	→ 85...253 V a.c. (40...50...400 Hz), 90...300 V d.c. or 20...40 V a.c., 20...60 V d.c.	power consumption \leq 6 VA
power consumption	in voltage circuit \leq 0.5 VA	in current circuit \leq 0.1 VA ($I_n = 1/5$ A); \leq 2.0 VA ($I_n = 63$ A)
input signal	0...0.1...1.2 I_n ; 0.1...0.2...1.2 U_n for current, voltage, PF, tgφ,	frequency 45...50...60...65 Hz, sinusoidal (THD \leq 8%)
power factor	-1...0...1	
preheating time	5 min.	
ambient temperature	-10...23...55°C, class K55 acc. to EN61557-12	
Humidity	0...40...65...95%	inadmissible condensation
operating position	any	
external magnetic field	\leq 40...400 A/m d.c.	\leq 3 A/m a.c. 50/60 Hz
short-term overload	voltage input: 2 U_n (5 sec.)	current input: 50 A for $I_n = 1A/5A$ (1 sec.) 630 A for $I_n = 63A$ (1 sec.)
admissible crest factor	current: 2	voltage: 2
additional error (in % of the intrinsic error)		from ambient temperature change: < 50% / 10°C

Safety and Compatibility Requirements

electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
isolation insured by the casing	double	acc. to EN 61010-1
isolation between circuits	basic	acc. to EN 61010-1
pollution level	2	acc. to EN 61010-1
installation category	III	acc. to EN 61010-1
Maximal phase-to-earth voltage	• for supply circuit and relay outputs 300 V • for measuring input 500 V • for circuits of RS-485, analog outputs: 50 V	acc. to EN 61010-1
altitude a.s.l.	< 2000 m	

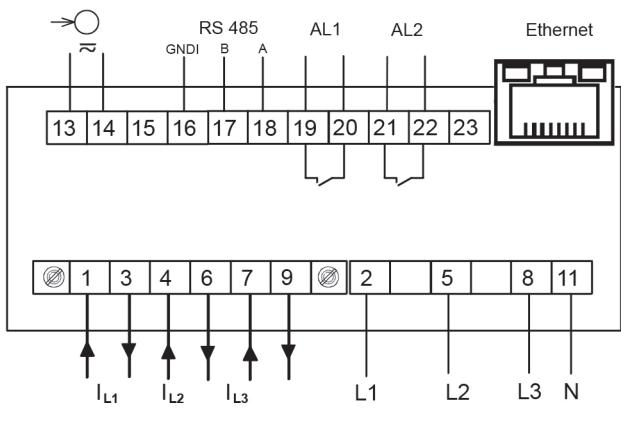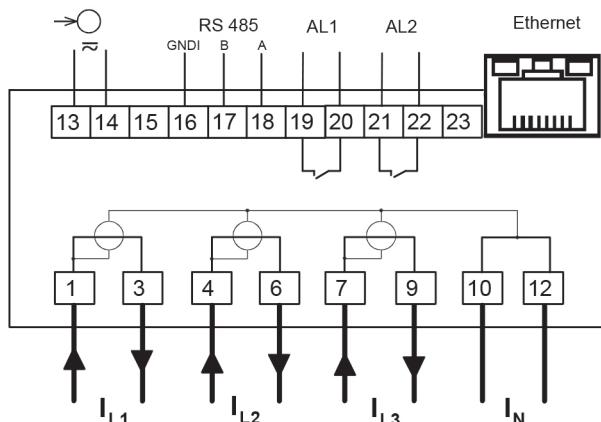Connection Diagrams

 Description of connection strips in the execution
of the meter for indirect connections

 Description of connection strips in the execution
of the meter for direct connections 63A

Displaying of Measurement Parameters

	A1	1	2	3	A2	1	2	3	E	T
U1					103.75	V				
U2					99.234	V				
U3					101.86	V				


Up to 22 programmable screens (3 parameters per page).

Easy to use and intuitive menu; information bar with status of: min. max values, phase sequence, alarm outputs, archiving status, Ethernet and RS-485 interfaces.

	H05	M00E	
U1	3.28%	I1	4.17%
U2	1.42%	I2	2.38%
U3	2.35%	I3	3.42%

One screen dedicated to harmonics; indication of individual harmonic for voltages and currents (up to 63rd).

Meter Configuration with Free eCON Software

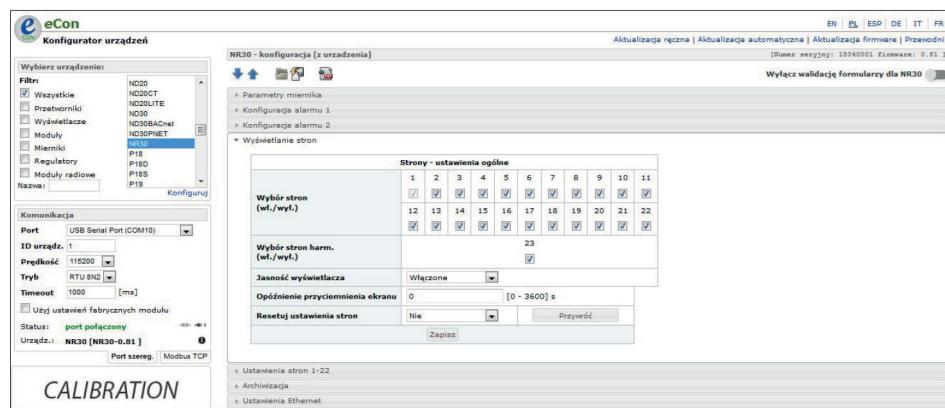


Ability to configure and update* NR30/NR30IoT with free econ software (via RS-485, USB or Ethernet interface).

* - update only via USB port.

Remote Readout of Parameters Through Ethernet: WWW, FTP Server

Miernik parametrów sieci 3-fazowej typ NR30			
Strona 1 U1 232.804 V	Strona 2 U12 400.306 V	Strona 3 I1 34.999 A	Strona 4 P1 7256.724 W
U2 230.099 V	U23 399.696 V	I2 40.002 A	P2 6356.399 W
U3 232.099 V	U31 402.218 V	I3 30.003 A	P3 5496.909 W
Strona 5 Q1 3705.170 var	Strona 6 PF1 0.891	Strona 7 tg1 0.511	Strona 8 ΣP 19.110 kW
Q2 6657.176 var	PF2 0.691	tg2 1.047	ΣQ 14.637 kvar
Q3 4275.123 var	PF3 0.789	tg3 0.778	ΣS 24.316 kVA
Strona 9 U avg 231.667 V	Strona 10 PF avg 0.786	Page 11 tg avg 0.766	Page 12 U2 228.917 V
I avg 35.001 A	Ig avg 1	f 49.999 Hz	I2 2.105 A
I(N) 5.636 A			I3 1.805 A
Page 13 U2 230.099 V	Page 14 Q2 6657.176 var	Page 15 I1 34.999 A	Page 13 U23 383.485 V
I2 40.002 A	S2 9204.444 VA	P1 7256.724 W	I31 392.212 V
P2 6356.399 W	PF2 0.691	ΣS 1125.744 VA	ΣS 725.942 var
Page 17 P DMD 19.111 kW	ΣP 19.110 kW	Page 19 ΣQ 14.637 kvar	Page 17 HARM: U1 U2 U3
S DMD 24.316 kVA	EnP+ 0.000 Wh	I1 30.003 A	EnP+ 0.000 Wh
I DMD 35.001 A	EnP- 0.000 Wh	P3 5496.909 W	EnP- 49.999 Wh
Page 21 THD U1 6.935 %	Page 22 THD I1 11.660 %	Page 20 ΣS 24.316 kVA	Page 21 HARM: I1 I2 I3
THD U2 6.926 %	THD I2 11.693 %	En S 366.842 kVA	En S 100% archiwum
THD U3 6.926 %	THD I3 11.708 %	f	Zamknij

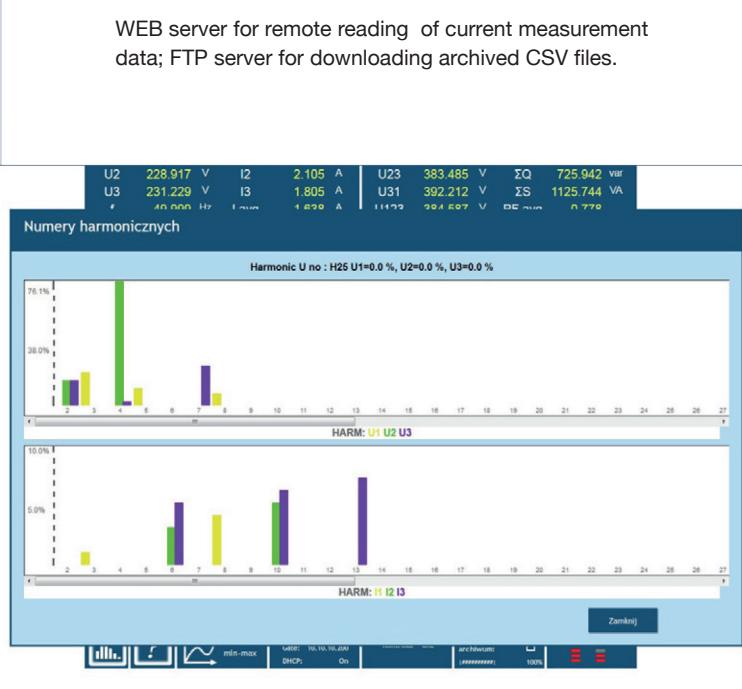

Ordering Code

Meter NR30	X	X	X	X	XX	X	X
Input current In:							
1/5 A (X/1; X/5)	1						
63 A	2						
Input voltage (phase/phase-to-phase) Un:							
3 x 57.7/ 100 V up to 3 x 100/ 170 V	1						
3 x 230/ 400 V up to 3 x 400/ 690 V	2						
Interface:							
RS-485 and Ethernet	2						
Supply:							
85...253 V a.c., 90...300 V d.c.	1						
20...40 V a.c., 20...60 V d.c.	2						
Version:							
standard	00						
with S4AO*: 4 current outputs 0/4 .. 20 mA	01						
with S4AO*: 4 voltage outputs 0 .. 10 V	02						
with S4AO*: 4 outputs (2 groups 1 x 0..10 V + 1 x 0/4 .. 20 mA)	03						
supervisory relay	SR						
custom-made**	XX						
Language:							
English	U						
other**	X						
Acceptance tests:							
without additional quality requirements	0						
with an extra quality inspection certificate	1						
with calibration certificate	2						
acc.to customer's request	X						

ORDERING WAY OF ADDITIONAL FUNCTIONS (SUPERVISORY RELAY, MQTT PROTOCOL)

Ordering code	Description of the license key
LKEY WXNR30MQ	activation of the MQTT protocol in NR30
LKEY WXNR30SR	activation of the supervisory relay function in NR30
LKEY WXNR30MS	activation of the MQTT protocol and the supervisory relay function in NR30

Important: When ordering, please provide the meter's execution code and serial number NR30. It is placed on the meter's nominal plate, in the configuration menu in the Information mode or on the bar in the eCon program.

Order example:

The code: **NR30 112100U0** means:

NR30 - NR30 meter

1 – input current 1/5 A (X/1; X/5)

1 – input voltage 3x57.7/100 V up to 3x100/170 V,

2 – RS485 and Ethernet,

1 – supply 85...253 V a.c., 90...300 V d.c.

00 – standard version,

U – english language version

0 – without additional quality requirements.

* 4-channel S4AO analog output module will be made in english version with the same power supply as the ordered NR30 meter, unless the customer specifies otherwise. The S4AO module communicates with the NR30 meter via the RS485 Modbus Master interface, therefore cooperation with S4AO excludes the use of the NR30 meter RS485 interface for communication with another Master.

**after agreement with the manufacturer

Meter NR30IoT	X	X	X	X	XX	X	X
Input current In:							
1/5 A (X/1; X/5)	1						
63 A	2						
Input voltage (phase/phase-to-phase) Un:							
3 x 57.7/ 100 V up to 3 x 100/ 170 V	1						
3 x 230/ 400 V up to 3 x 400/ 690 V	2						
Interface:							
RS-485 and Ethernet	2						
Supply:							
85...253 V a.c., 90...300 V d.c.	1						
20...40 V a.c., 20...60 V d.c.	2						
Version:							
standard with MQTT protocol	MQ						
MQTT protocol + supervisory relay	MS						
with S4AO*: 4 current outputs 0/4 .. 20 mA	01						
with S4AO*: 4 voltage outputs 0 .. 10 V	02						
with S4AO*: 4 outputs (2 groups 1 x 0..10 V + 1 x 0/4 .. 20 mA)	03						
custom-made**	XX						
Language:							
English	U						
other**	X						
Acceptance tests:							
without additional quality requirements	0						
with an extra quality inspection certificate	1						
with calibration certificate	2						
acc.to customer's request	X						

ORDERING WAY OF ADDITIONAL FUNCTIONS (SUPERVISORY RELAY)

Ordering code	Description of the license key
LKEY WXNR30IOTMS	activation of the supervisory relay function in NR30IoT

Important: When ordering, please provide the meter's execution code and serial number NR30IoT. It is placed on the meter's nominal plate, in the configuration menu in the Information mode or on the bar in the eCon program.

Order example:

The code: **NR30IoT 1121MQU0** means:

NR30IoT - NR30IoT meter

1 – input current 1/5 A (X/1; X/5)

1 – input voltage 3x57.7/100 V up to 3x100/170 V,

2 – RS485 and Ethernet,

1 – supply 85..253 V a.c., 90..300 V d.c.

MQ – standard version with MQTT protocol,

U – english language version

0 – without additional quality requirements.

* 4-channel S4AO analog output module will be made in english version with the same power supply as the ordered NR30IoT meter, unless the customer specifies otherwise. The S4AO module communicates with the NR30IoT meter via the RS485 Modbus Master interface, therefore cooperation with S4AO excludes the use of the NR30IoT meter RS485 interface for communication with another Master.

**after agreement with the manufacturer

Contact**Sifam Tinsley Instrumentation Ltd**

1 Warner Drive
Springwood Industrial Estate
Braintree
Essex
CM7 2YW

Tel: 01376 335271
Email: sales@sifamtinsley.com

www.sifamtinsley.co.uk