



DATASHEET

Issue 1.0



Multifunction Meters

Transducers & Isolators

Temperature Controllers

Converters & Recorders

Digital Panel Meters

Current Transformers

Analogue Panel Meters

Shunts

Digital Multimeters

Clamp Meters

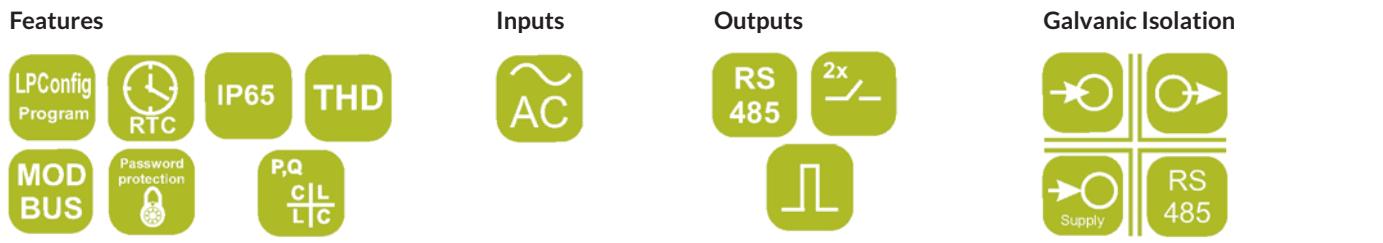
Insulation Testers

Features

- ➔ Meter supply from measurement circuit
- ➔ Measurement of basic power quantities:
 U_{LL} , U_{LN} , I_n , f , P , Q , S , PF , $tg\phi$, $\cos\phi$, ϕ , E_p+ , E_p- , E_{qL} , E_{qC} , THD
- ➔ 2 alarm outputs
- ➔ Pulse output for active energy
- ➔ Interface RS485 Modbus Slave (option)
- ➔ LCD display 3.5"
- ➔ Protection grade from the frontal side IP65

SUBJECT TO CHANGE WITHOUT NOTICE

This manual superseded all previous versions – please keep for future reference


Example of Application:

Measured Quantities & Measuring Ranges

Measured value	Indication range	Measuring range	L1	L2	L3	Σ	Basic error
Current In	1 A 5 A	0.00...1.5 kA 0.00 ... 60 kA	0,005...1,200 A~ 0,025...6,000 A~	•	•	•	$\pm 0.2\% r$
Voltage L-N	57,7 V 230 V 290 V	0.0 ... 230.8 kV 0.0 ... 1.012 MV 0.0 ... 1.200 MV	50...64 V~ 195...253 V~ 246...300 V~	•	•	•	$\pm 0.2\% mv$
Voltage L-L	100 V 400 V 500 V	0.0 ... 440 kV 0.0 ... 1.752 MV 0.0 ... 2.000 MV	85...110 V~ 340 ... 440 V~ 425 ... 520 V~	•	•	•	$\pm 0.5\% mv$
Frequency	47.0 ... 63.0 Hz	47,0...63,0 Hz	•	•	•		$\pm 0.2\% mv$
Active power	-9999 MW ... 0.00 W ... 9999 MW	-1,52 kW...1,0 W...1,52 kW	•	•	•	•	$\pm 0.5\% r$
Reactive power	-9999 Mvar ... 0.00 var ... 9999 Mvar	-1.52 kvar...1.0 var...1.52 kvar	•	•	•	•	$\pm 0.5\% r$
Apparent power	0.00 VA ... 9999 MVA	1.0 VA...1.52 kVA	•	•	•	•	$\pm 0.5\% r$
Power factor PF	-1 ... 0 ... 1	-1...0...1	•	•	•	•	$\pm 1\% r$
Tangent ϕ	-1.2 ... 0 ... 1.2	-1.2...0...1.2	•	•	•	•	$\pm 1\% r$
Cosine ϕ	-1...1	-1...1	•	•	•	•	$\pm 1\% r$
ϕ	-180...180	-180...180	•	•	•		$\pm 0.5\% r$
Imported active energy	0 ... 99 999 999.9 kWh					•	$\pm 0.5\% r$
Exported active energy	0 ... 99 999 999.9 kWh					•	$\pm 0.5\% r$
Inductive reactive energy	0 ... 99 999 999.9 kvarh					•	$\pm 0.5\% r$
Reactive capacitive energy	0 ... 99 999 999.9 kvarh					•	$\pm 0.5\% r$
THD	0 ... 100%	0 ... 100%	•	•	•		$\pm 5\% r$

r - of the range

mv - of the measured value

Outputs

Output type	Properties
Relay output	• 2 relays, normally open voltageless contacts, load capacity 250 V~/0,5 A~
Pulse output of active energy	• 1 OC type (NPN), passive class A acc. to EN 62053-31, supply voltage 18...27 V, current 10...27 mA

Digital Interface

Interface type	Transmission protocol	Mode	Baud rate
RS-485	MODBUS RTU	8N2,8E1,8O1,8N1	4.8; 9.6; 19.2; 38.4 kbit/s

External Features

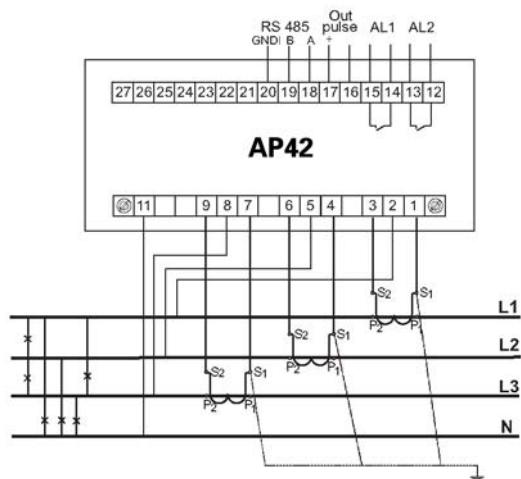
Readout field	LCD 3.5" screen, specialized, monochromatic with backlit	
Weight	< 0.3 kg	
Overall dimensions	96 x 96 x 77mm	panel cut-out: 92+0,6 x 92+0,6mm
Protection grade (acc. to EN 60529)	from frontal side: IP65	from terminal side: IP20

Rated Operating Conditions

Supply voltage /from measurement circuit of phase L3/	50...64 V a.c., 195...253 V a.c., 246...300 V a.c.; 47...63 Hz	Power consumption: - in voltage circuit L1, L2, ≤0.05 VA - in voltage circuit L3 ≤3 VA - in current circuits ≤0.05 VA
Temperature	ambient: -20...23...70°C	storage: -30...80°C
Relative humidity	25...95%	inadmissible condensation
Operating position	any	
External magnetic field	40...400 A/m	
Short duration overload (5 s)	voltage input: 2 Un	current input: 10 In

Safety and Compatibility Requirements

Electromagnetic compatibility	noise immunity noise emissions	acc. to EN 61000-6-2 acc. to EN 61000-6-4
Safety requirements		acc. to EN 61010-1

Example of Connection Diagram


Ordering

	AP42	X	X	XX	X	X
Current input In:						
1 A (X/1) 1						
5 A (X/5) 2						
Voltage input (phase/ phase-to-phase) Un:						
3 x 57.7/100 V 1						
3 x 230/400 V 2						
3 x 290/500 V 3						
Digital output:						
without RS485 interface 0						
with RS485 interface 1						
Version:						
standard 00						
custom-made* XX						
Language:						
English E						
other* X						
Acceptance tests:						
without extra quality requirements 0						
with an extra quality inspection certificate 1						
acc. to customer's request* X						

* - after agreeing with the manufacturer

Example of Order

the code: AP42 - 2 2 1 00 E 1 means:
 AP42 - meter of network parameters of AP42 type,
 2 - current input 5 A,
 2 - input voltage 3 x 230/400 V,
 1 - with RS485 interface
 00 - standard version,
 E - all descriptions and user's manual in English,
 1 - with extra quality inspection certificate.

Contact



Sifam Tinsley Instrumentation Ltd

1 Warner Drive
 Springwood Industrial Estate
 Braintree, Essex
 CM7 2YW

Tel: 01376 335271
 E-mail: sales@sifamtinsley.com

www.sifamtinsley.co.uk